



TEMPLE QUAY

Groundworks, Infrastructure and Archaeology

PROJECT SCOPE

VertaseFLI was contracted by Castlemore Securities to undertake a contract to undertake an archaeological excavation prior to undertaking groundworks, drainage, infrastructure and landscaping for the Temple Quay site in Bristol.

VERTASE FLI ROLE

VertaseFLI was appointed as Principal Contractor for the works. The work involved the undertaking of an archaeological excavation around some existing structures before completing the groundworks and infrastructure works to enable the erection of a permanent viewing structure.

Following completion of the archaeological excavation, a sheet pile wall structure was completed around the area before levels around the sheet pile wall were brought up to formation level. Following this, drainage, lighting ducting and cabling was laid before placement of final surfacings. Lighting columns were installed along with other street furniture before final erection of the sculpture / monuments.

Basement excavations were also undertaken which involved the installation of an access / egress ramp and disposal of hazardous waste arisings.



PROJECT OVERVIEW

CLIENT

CASTLEMORE SECURITIES

LOCATION

BRISTOL

PROJECT VALUE

£1M

DURATION

10 MONTHS

SERVICES PROVIDED


- Basement excavation
 - Archaeology
 - Sheetpiling
 - Drainage and infrastructure
 - Surfacing
 - Landscaping
-



EXCAVATION TO INSTALL NEW DRAINAGE



FINISHED HARD SURFACING

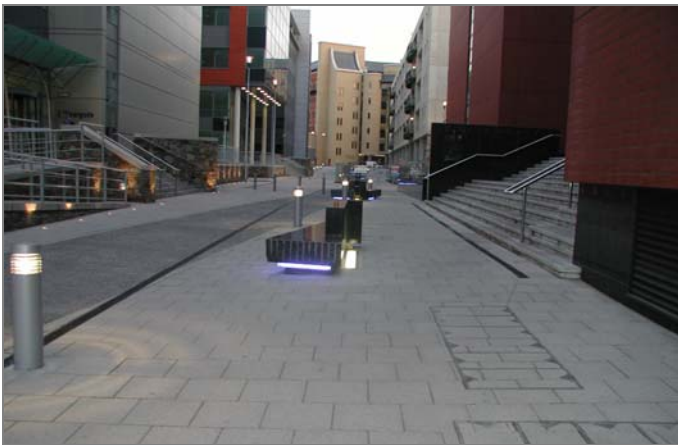

STREET FURNITURE



SHEETPILE RETAINING STRUCTURE AND GROUNDWORKS



ARCHAEOLOGICAL EXCAVATION WITH STRUCTURE AROUND



FINISHED SITE